




# VULCAN

## REFRACTORIES APPLICATIONS ELECTRICAL CERAMICS

### Process Information : Ferrites & Electrical Ceramics

Electrical ceramics are fired in intermittent, pusher hearth and gas tight roller furnaces. Atmosphere and temperature distribution are critical factors in product quality. Substrates and kiln furniture should also have high purity to avoid product contamination.

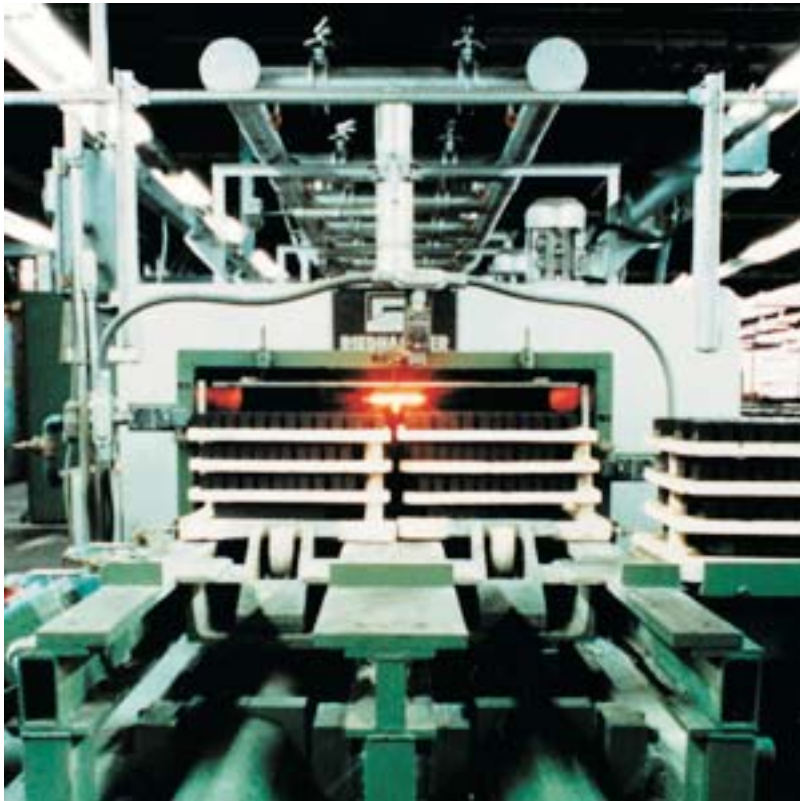

- Endothermic and Exothermic Atmospheres
- $\Delta T$  to 300°C per hour
- Temperatures to 1450°C

#### DISCLAIMER

Any advice, opinion, recommendation or information is given to assist the use of the company's products but on the basis that the end user must ensure their suitability for the application intended.

In particular the company cannot accept liability for loss or damage which may arise from the incorrect use of its products or from poor workmanship on the part of the user.

Information is compiled from routine quality control testing and does not constitute a specification.

Information is provided in good faith and is subject to review whenever necessary and no guarantee or warranty is implied.

THIS CD-ROM IS VALID UNTIL 31/12/2002 TO RECEIVE A CURRENT ISSUE PLEASE CONTACT VULCAN REFRACTORIES

#### Vulcan Refractories Limited

Tel. +44 (0)1538 752 238 Fax. +44 (0) 1538 753 349 E-Mail [enquiries@vulcanrefractories.com](mailto:enquiries@vulcanrefractories.com) Web [www.vulcanrefractories.com](http://www.vulcanrefractories.com)